

Precision Positioning Stage| PPS-70LM

NEW

www.micronixusa.com | info@micronixusa.com | phone: +1 (949) 480 0538 | fax: +1 (949) 480 0538

Preliminary

The linear stage PPS-70 allows nanopositioning at high speeds. Anti-creep, crossed roller bearings assure high stiffness for loads up to 30N. Its low profile suits applications in which height is critical and stiffness is a must. The PPS-70 is fully integrated with high resolution encoder (up to 5nm resolution). The PPS-70 can be combined with our rotational stages PR-50, PR-70, Gonio stage PG-50, and our elevation stage ES-50PM for optimal motion solutions. The PPS-70 is compatible with our NanoDrive controller.

KEY FEATURES

- Standard travel range of up to 100 mm
- Internal digital encoder of 5nm resolution
- Internal absolute encoder of 25nm resolution
- Load capacity up to 3kg (higher on request)
- Crossed roller bearing (anti-creep)
- Low profile, 15mm height

TECHNICAL DATA





Travel range [mm]	32	51	75	100
Straightness / Flatness [μm]	±3	±5	±7	±7
Pitch [μrad]				
Yaw [μrad]				
Weight [g], Closed Loop	175	250	330	400
Motor option	Linear Motor			
Speed, max [mm/s]	150 (Incremental Enc), 300 (Absolute Enc)			
Encoder option	Digital (RS-422)		Absolute (BiSS C)	
Resolution, typical [nm]	5		25	
Repeatability, bi-directional [nm]	± 50		± 200	
Repeatability, uni-directional [nm]	50		200	
Materials	aluminum, steel bearing (other materials i.e. stainless steel, titanium, etc. available upon request)			

ORDERING INFORMATION

PPS-70- 3 1

DRIVE	Linear Motor, LM-006	3
TRAVEL	32 mm	1
	51 mm	2
	75 mm	3
	100 mm	4
ENCODER	Digital (RS-422)	3
	Absolute (BiSS C)	5
LIMIT SWITCH	Magnetic	1
ENVIRONMENT	Atmospheric	0
	High Vacuum (10^{-6} mbar)	6

Load, max	F_x [N]	F_y [N]	F_z [N]	M_x [N-m]	M_y [N-m]	M_z [N-m]	k_{ax} [μ rad/N-m]	k_{ay} [μ rad/N-m]
LM-006	2 Continuous 5 Peak	20	30	0.2	0.2	0.125	-	-

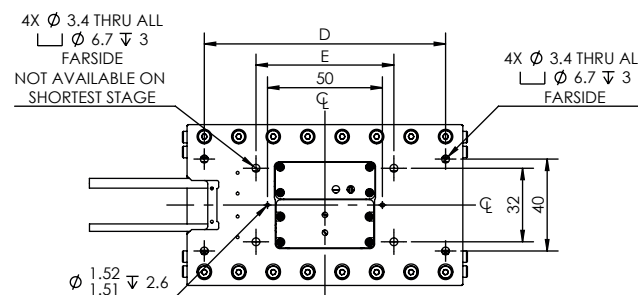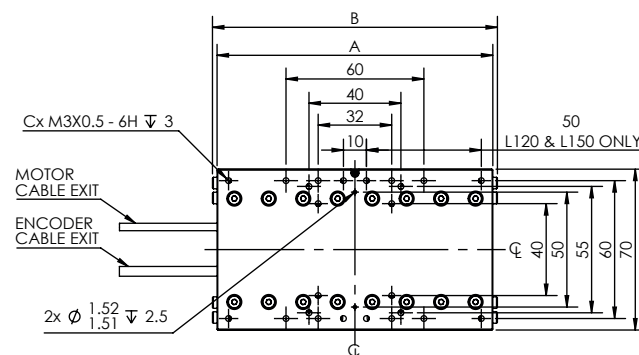

TRAVEL	A	B	C	D	E
30	60	64	16	55	-
50	90	94	16	80	60
75	120	124	24	105	60
100	150	154	24	135	60

• all dimensions are in millimeters

micronix USA
PRECISION MOTION SOLUTIONS

Specifications are subject to change without notice.